
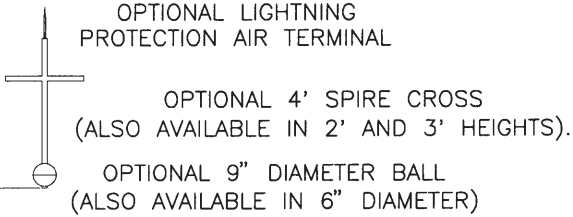


# Steeple #10

figure - 1

**DESIGN PARAMETERS**  
 The unit described in these drawings is engineered to adequately support the loads created by a wind velocity of 120 MPH at a height of 50 feet above ground using ACSCE 7-95 exposure category "C". An additional 2 feet in height was added to the base during these calculations to account for variations in roof pitch, etc.

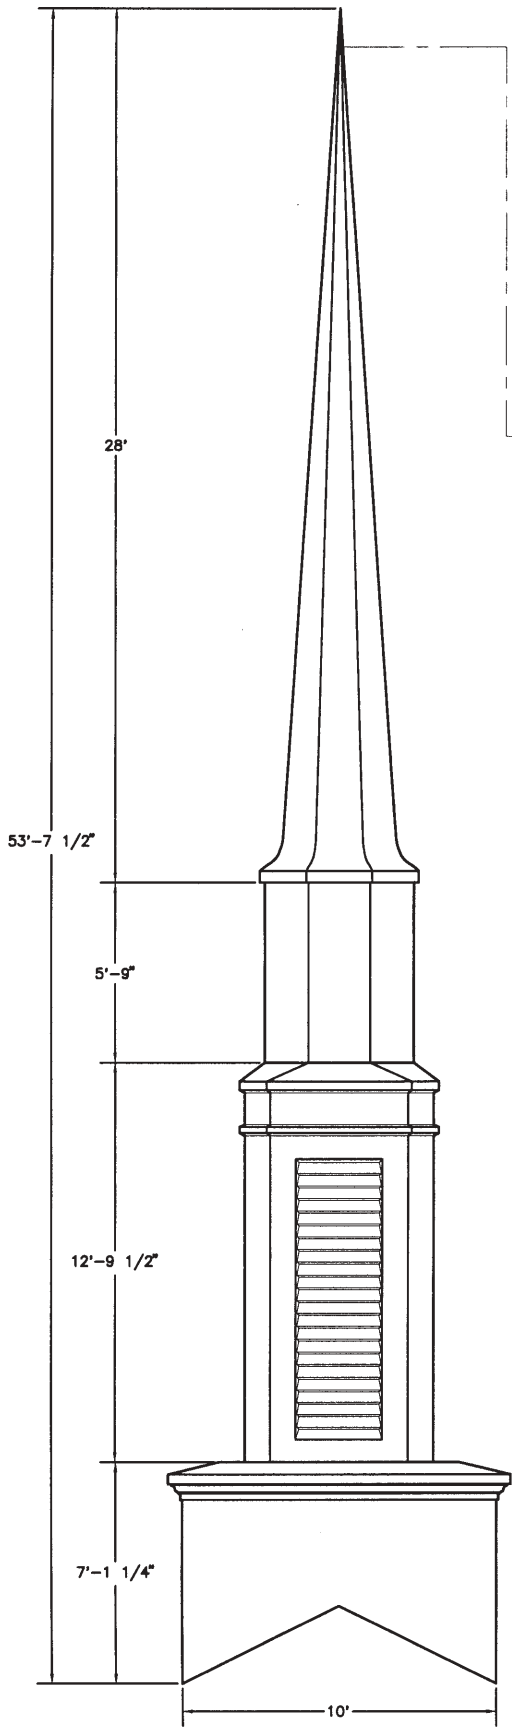

ALL UNITS WERE ENGINEERED WITH A 4' CROSS AND 9"φ BALL INSTALLED PER FIBERGLASS SPECIALTIES, INC. STANDARD MOUNTING PROCEDURES.

SPIRE UNIT #728

CUPOLA UNIT #701

CUPOLA UNIT #706 WITH FALSE LOUVERS

CUPOLA UNIT #705


12  
 ? SPECIFY ROOF PITCH & TYPE

Dimensions and details are subject to change without notice. All cupola and steeple units are fabricated using minimal standing seams unless otherwise noted. All cupola and steeple units are designed to be erected on a completed roofing system and are not guaranteed to be leak proof.


# Steeple #10

figure - 2


**DESIGN PARAMETERS**  
 The unit described in these drawings is engineered to adequately support the loads created by a wind velocity of 120 MPH at a height of 50 feet above ground using ACSCE 7-95 exposure category "C". An additional 2 feet in height was added to the base during these calculations to account for variations in roof pitch, etc.

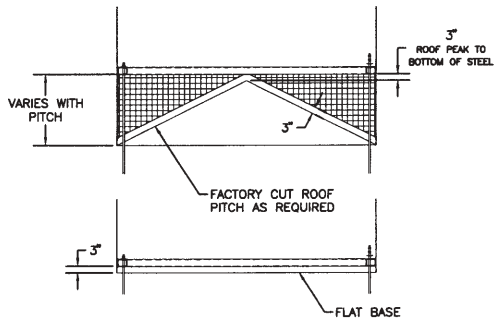


6 BASE DETAILS  
S1




5 BOLTING DETAIL  
S1




4 BOLTING DETAIL  
S1



3 BOLTING DETAIL  
S1



2 ANCHOR DETAIL  
S1

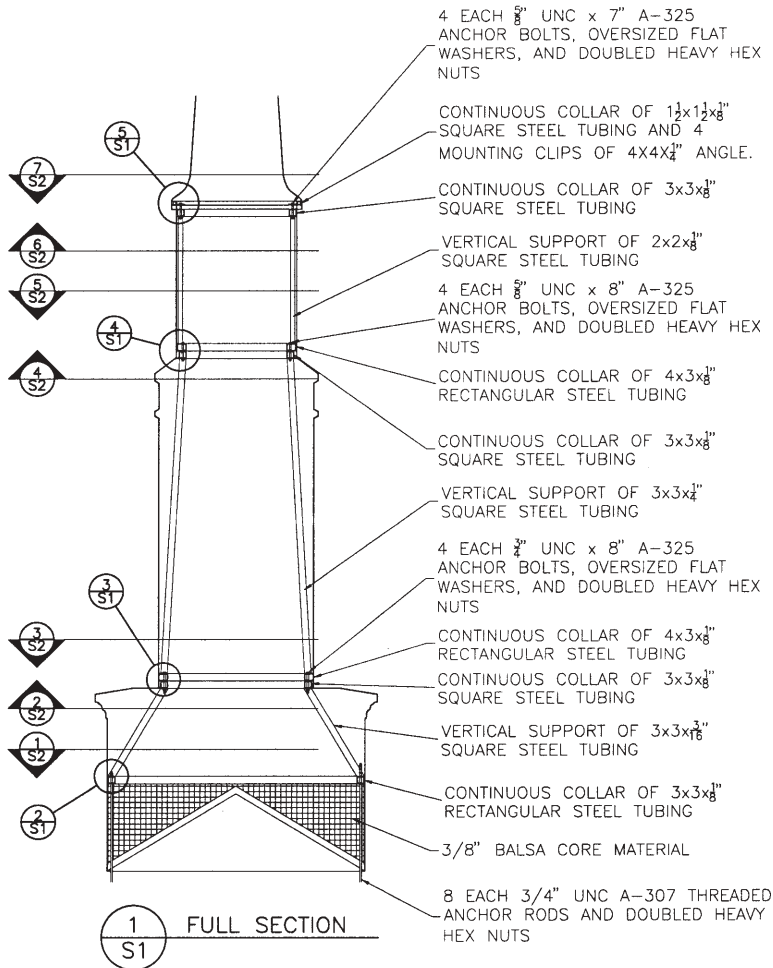


1 FULL SECTION  
S1


# Steeple #10

figure - 3


**DESIGN PARAMETERS**  
 The unit described in these drawings is engineered to adequately support the loads created by a wind velocity of 120 MPH at a height of 50 feet above ground using ACSCE 7-95 exposure category "C". An additional 2 feet in height was added to the base during these calculations to account for variations in roof pitch, etc.

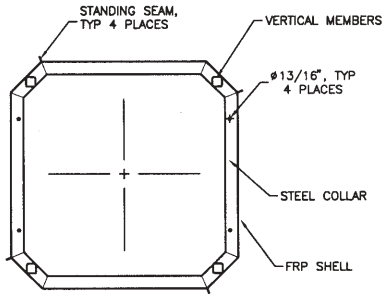


3 BASE OF CU-706  
S2 PLAN VIEW

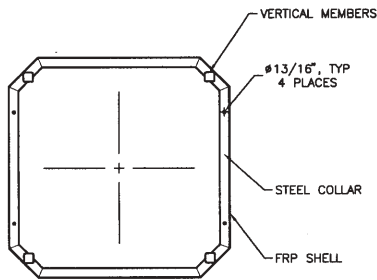


2 TOP OF CU-705  
S2 REFLECTED VIEW

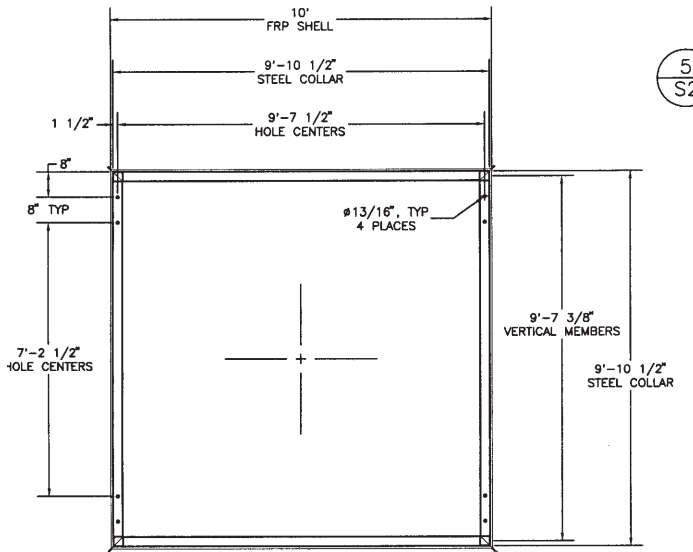


1 BASE OF CU-705  
S2 PLAN VIEW




7 BASE OF SP-728  
S2 PLAN VIEW



6 TOP OF CU-701  
S2 REFLECTED VIEW



5 BASE OF CU-701  
S2 PLAN VIEW



4 TOP OF CU-706  
S2 REFLECTED VIEW

Dimensions and details are subject to change without notice. All cupola and steeple units are fabricated using minimal standing seams unless otherwise noted. All cupola and steeple units are designed to be erected on a completed roofing system and are not guaranteed to be leak proof.