


Steeple #8

figure - 1

DESIGN PARAMETERS
 The unit described in these drawings is engineered to adequately support the loads created by a wind velocity of 120 MPH at a height of 50 feet above ground using ACSCE 7-95 exposure category "C". An additional 2 feet in height was added to the base during these calculations to account for variations in roof pitch, etc.

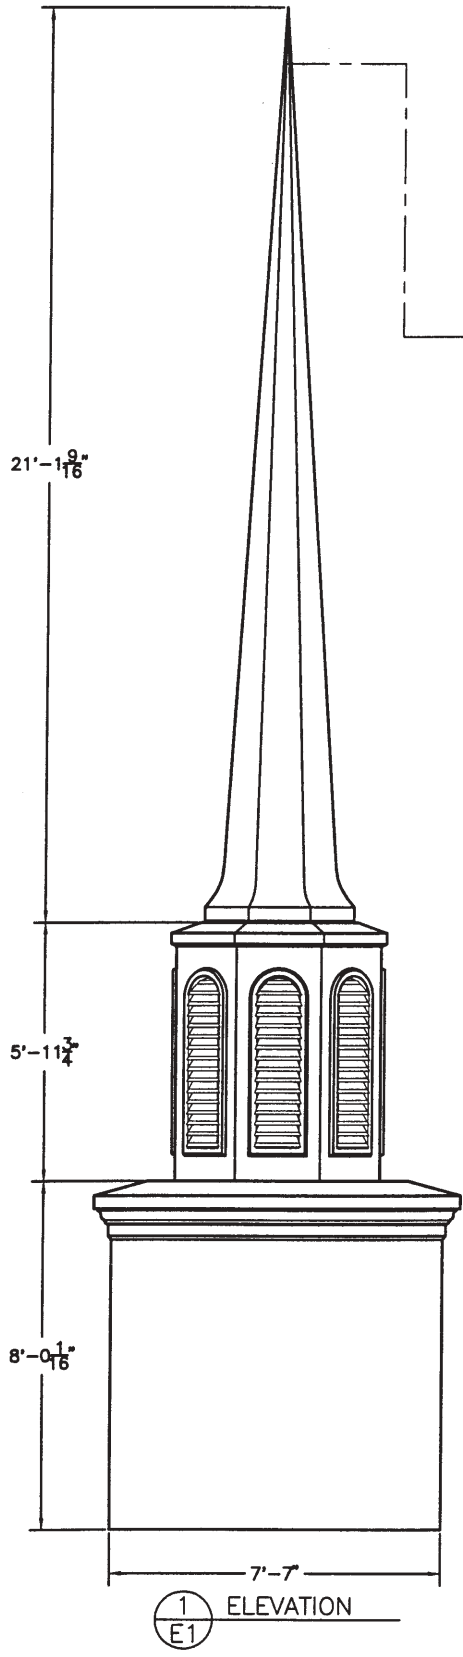

OPTIONAL LIGHTNING PROTECTION AIR TERMINAL

OPTIONAL 4' SPIRE CROSS (ALSO AVAILABLE IN 2' AND 3' HEIGHTS).

OPTIONAL 9" DIAMETER BALL (ALSO AVAILABLE IN 6" DIAMETER)

ALL UNITS WERE ENGINEERED WITH A 4' CROSS AND 9"Ø BALL INSTALLED PER FIBERGLASS SPECIALTIES, INC. STANDARD MOUNTING PROCEDURES.

SPIRE UNIT #619

CUPOLA UNIT #601 WITH VENTED LOUVERS (ALSO AVAILABLE WITH FALSE LOUVERS OR KRINKLGLAS® WINDOWS)

CUPOLA UNIT #703


Dimensions and details are subject to change without notice. All cupola and steeple units are fabricated using minimal standing seams unless otherwise noted. All cupola and steeple units are designed to be erected on a completed roofing system and are not guaranteed to be leak proof.

① ELEVATION


Steeple #8

figure - 2


DESIGN PARAMETERS
 The unit described in these drawings is engineered to adequately support the loads created by a wind velocity of 120 MPH at a height of 50 feet above ground using ACSCE 7-95 exposure category "C". An additional 2 feet in height was added to the base during these calculations to account for variations in roof pitch, etc.

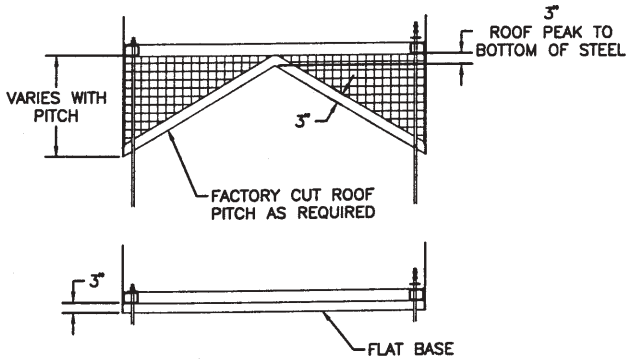


5 BASE DETAILS
S1

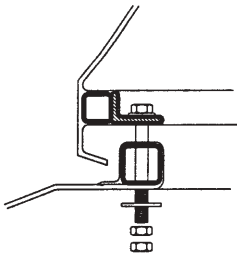


4 BOLTING DETAIL
S1

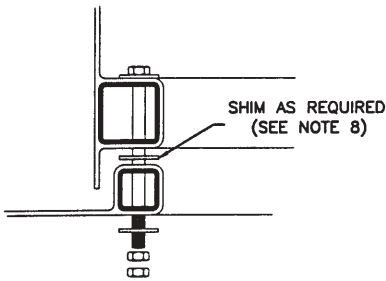

3 BOLTING DETAIL
S1




2 ANCHOR DETAIL
S1

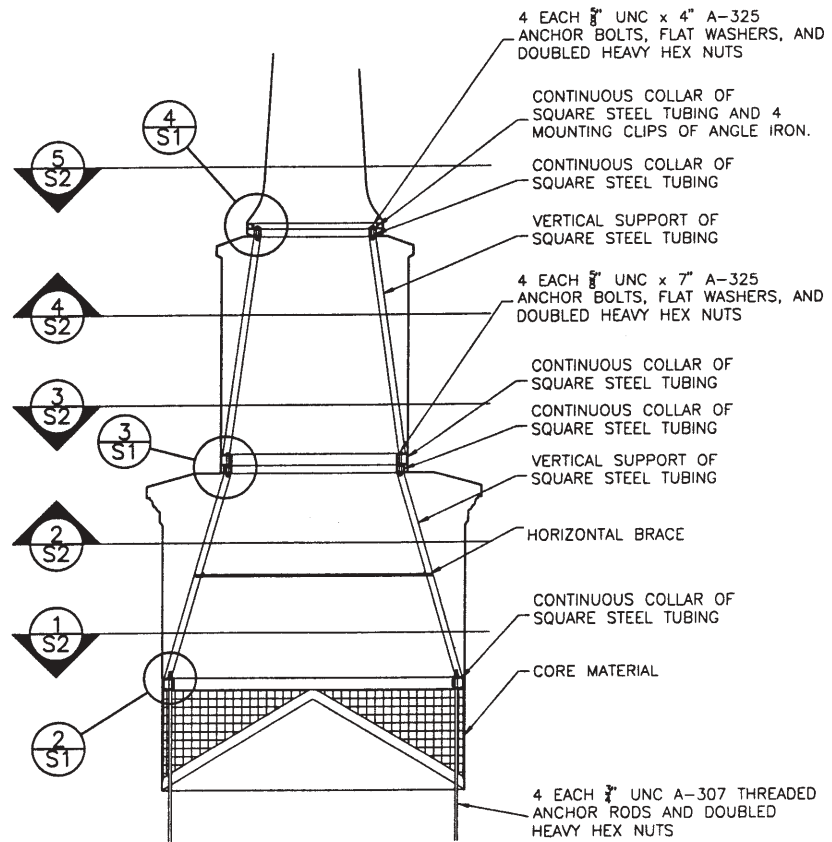


1 FULL SECTION
S1

Steeple #8


figure - 3

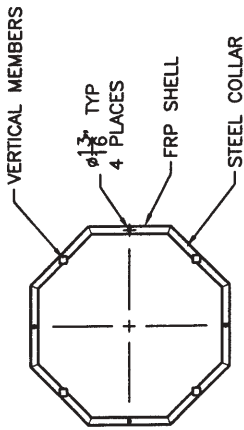


2 TOP OF CU-703
S2 REFLECTED VIEW

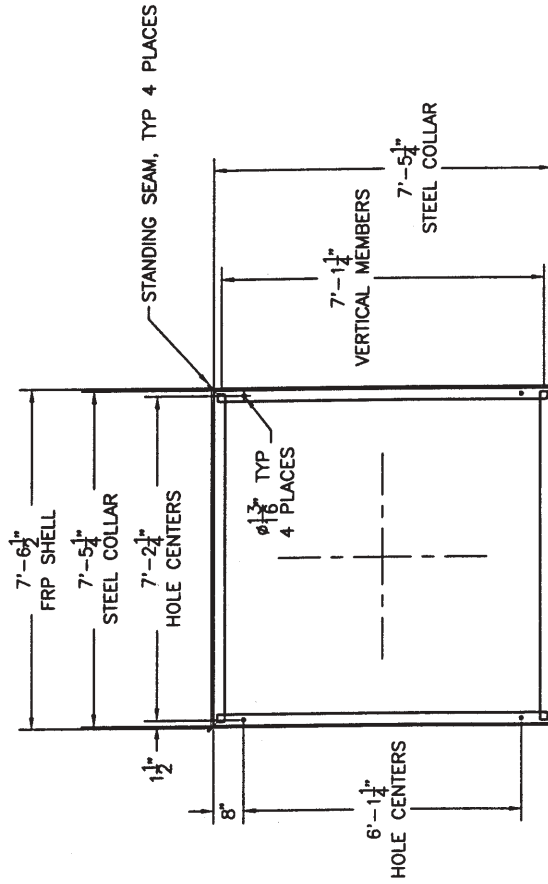


1 BASE OF CU-703
S2 PLAN VIEW

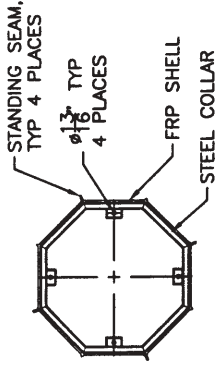

5 BASE OF SP-619
S2 PLAN VIEW

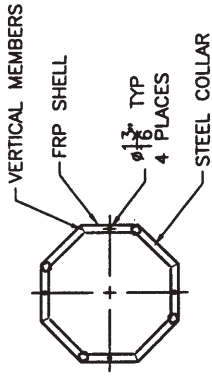

4 TOP OF CU-601
S2 REFLECTED VIEW

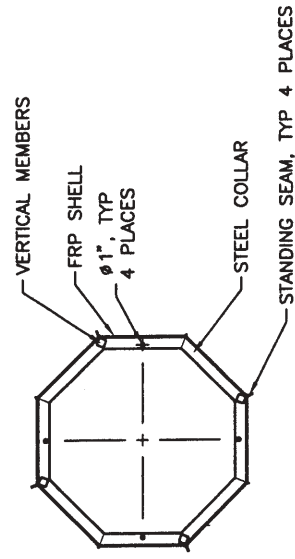

3 BASE OF CU-601
S2 PLAN VIEW